


librespeed

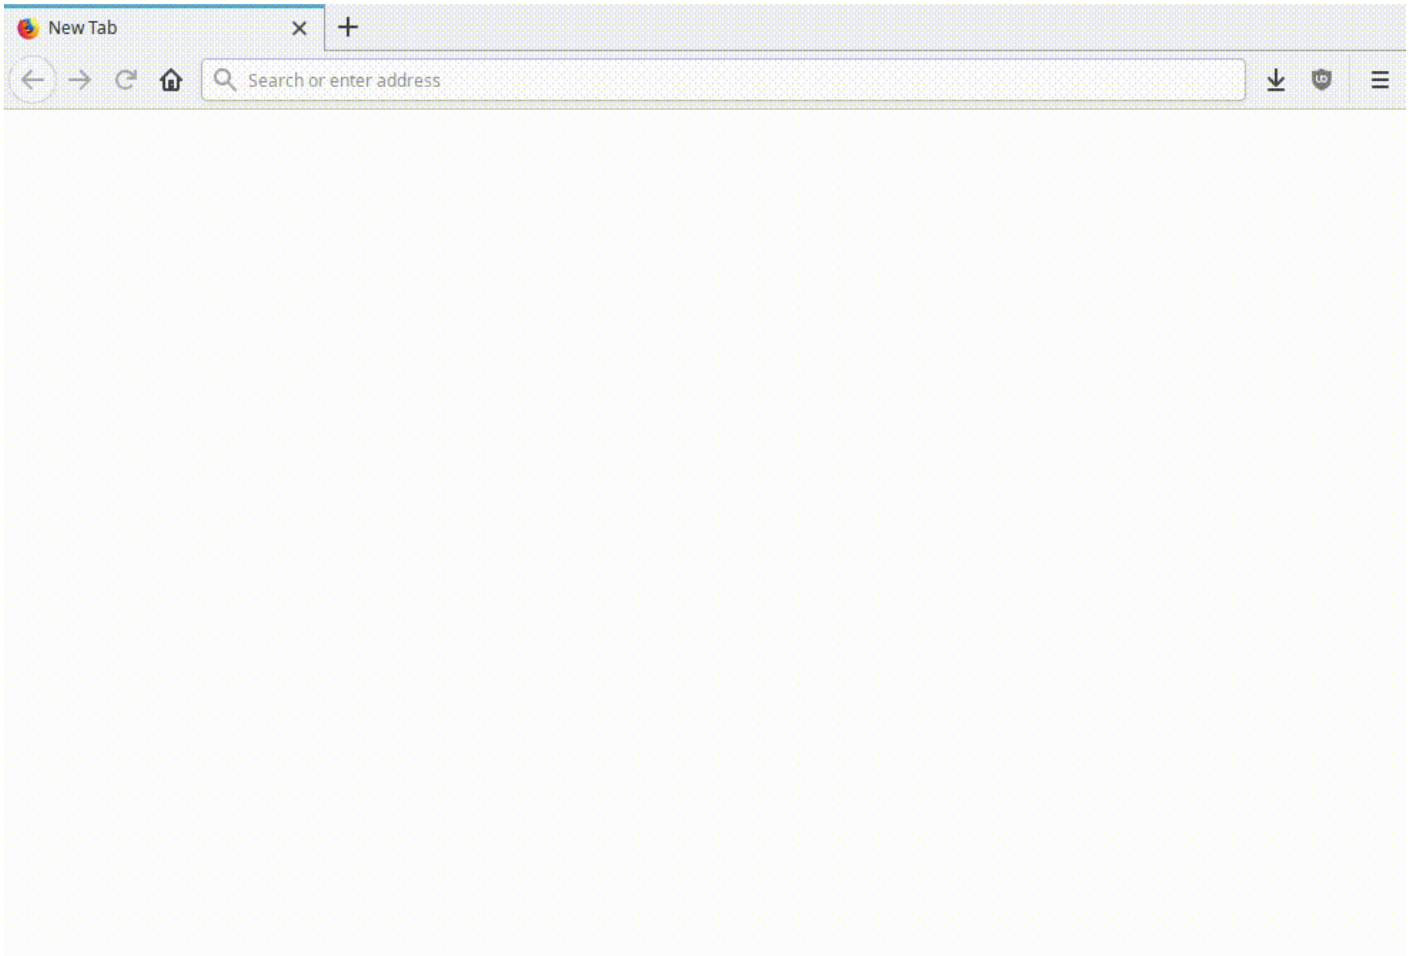

```
docker volume create librespeed_config
```

```
services:
  librespeed:
    image: lscr.io/linuxserver/librespeed:latest
    container_name: librespeed
    environment:
      - PUID=1000
      - PGID=1000
      - TZ=Etc/UTC
#     - PASSWORD=PASSWORD
#     - CUSTOM_RESULTS=false #optional
#     - DB_TYPE=sqlite #optional
#     - DB_NAME=DB_NAME #optional
#     - DB_HOSTNAME=DB_HOSTNAME #optional
```

```
# - DB_USERNAME=DB_USERNAME #optional
# - DB_PASSWORD=DB_PASSWORD #optional
# - DB_PORT=DB_PORT #optional
# - IPINFO_APIKEY=ACCESS_TOKEN #optional
volumes:
  - librespeed_config:/config
ports:
  - 85:80
restart: unless-stopped
networks:
  librespeed_network:
    driver: bridge
    # Permet la communication externe mais isole des autres conteneurs
    internal: false
volumes:
  librespeed_config:
    external: true
```

Révision #4

Créé 2025-05-06 00:26:52 CEST par Philippe Favre

Mis à jour 2025-05-06 02:25:49 CEST par Philippe Favre